

Select Year

2024

▼

Select Make

Honda

▼

Select Model

Civic Type R 5dr

▼

Select Fit

Naked Roof | BaseLine

▼


NAKED ROOF | BASELINE FIT ON HONDA CIVIC TYPE R 5DR 2023-2024

BASE RACK

- TOWER: BaseLine Towers (4-Pack)
- FRONT CLIP: BaseClip 136 (B10-2)
- REAR CLIP: BaseClip 133 (B65-5)
- FAIRING: 46" WindShield
- MINIMUM BAR SIZE: Small

MEASUREMENTS

- FRONT BAR PITCH (P1): A
- FRONT BAR TOE (T1): 1
- M1: 38 3/4 "
- M2: 4 "
- M3: 34 1/4 "
- M4: 27 1/2 "
- REAR BAR PITCH (P2): B
- REAR BAR TOE (T2): 2
- WEIGHT LIMIT: 165 lbs

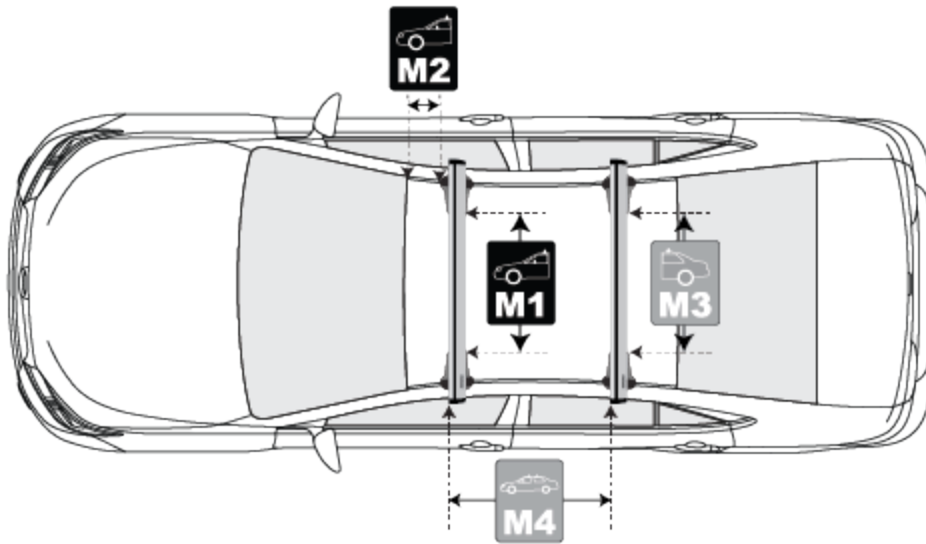

Front Crossbar:
Inner edge of driver's side tower to inner edge of passenger's side tower



Front Crossbar:
Corner of painted roof (or corner of glass on panoramic roofs) to leading edge of front tower




Rear Crossbar:
Inner edge of driver's side tower to inner edge of passenger's side tower



Crossbar Spread:
Leading edge of front crossbar to leading edge of rear crossbar

(https://yakima.com/Content/images/m_baseline.png)

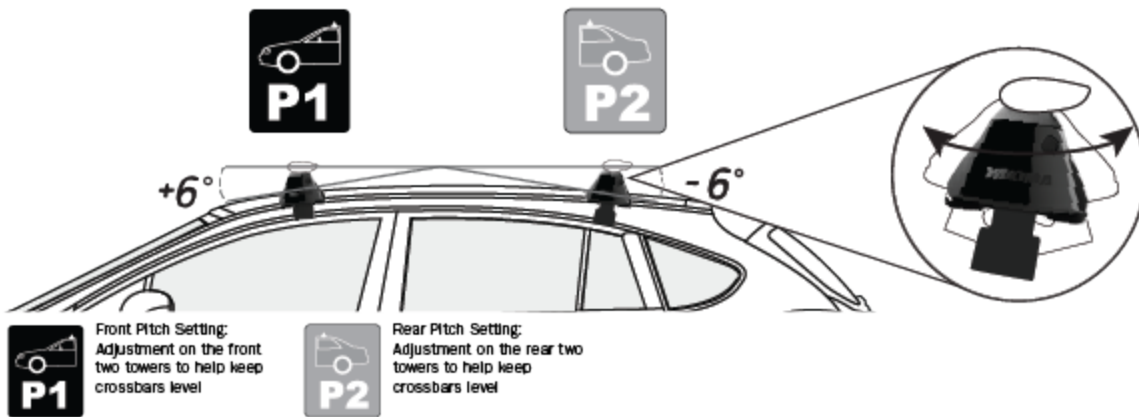


Front Pitch Setting:
Adjustment on the front two towers to help keep crossbars level



Rear Pitch Setting:
Adjustment on the rear two towers to help keep crossbars level

(<https://yakima.com/Content/images/PitchAdjustment.png>)

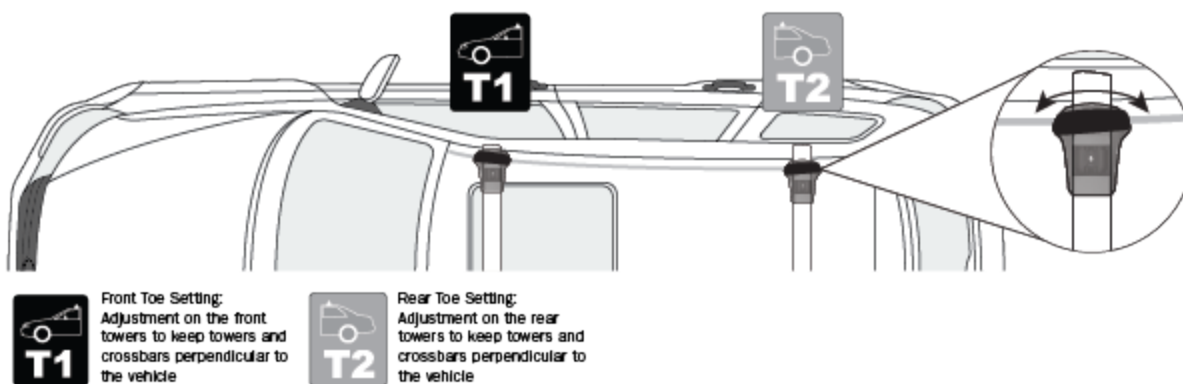

Front Toe Setting:
Adjustment on the front towers to keep towers and crossbars perpendicular to the vehicle



Rear Toe Setting:
Adjustment on the rear towers to keep towers and crossbars perpendicular to the vehicle

(<https://yakima.com/Content/images/ToeAdjustment.png>)

COMPATIBLE PRODUCTS

Bike

SideWinder
Raptor Aero
ForkLift
FrontLoader
WheelHouse
HighRoad (2017-2023)
HighSpeed (2017-2023)
HighRoad
HighSpeed

Water

MultiMount (2003-2017)
Hullraiser Aero (2007-2017)
BigStack
BowDown
Mako Aero (1pair)
WaveHog
EvenKeel
ShowBoat 66
KeelOver
JayLow
SweetRoll
SupDawg
SupPup
HULLHOUND (1Pair)
HandRoll
DeckHand
JayHook
BigCatch
Gunwale Brackets (2001)

Snow

FatCat 4 (2012-2017)
FatCat 6 (2012-2017)
FATCAT 6 Limited Edition
FreshTrack 4
FreshTrack 6
PowderHound 6 (2017)
FatCat EVO 4, Black

FatCat EVO 6, Black
FatCat EVO 6, Protect Our Winters

Cargo Boxes

LockNLoad Platform K (55x49)

LoadWarrior

SkyBox LoPro Titanium

SkyBox Pro 12 Titanium

SkyBox Pro 16 Titanium

SkyBox Pro 18 Titanium

SkyBox Pro 21 Titanium

RocketBox Pro 14

SkyBox Pro 12 Onyx

SkyBox Pro 18 Onyx

SkyBox LoPro Onyx

SkyBox LoPro Onyx

ShowCase 15 Anthracite

ShowCase 20 Anthracite

SkyBox 12 Carbonite

SkyBox 18 Carbonite

SkyBox Lo Carbonite

SkyBox NX 18

CBX Solar

GrandTour 16

GrandTour Lo

SkinnyWarrior

OffGrid Medium

SkyBox Pro 12 Silver

SkyBox Pro 16 Silver Silver

SkyBox Pro 18 Silver Silver

SkyBox Pro 21 Silver Silver

RocketBox Pro 12

RocketBox Pro 11

SkyBox Pro 16 Onyx

SkyBox Pro 21 Onyx

SkyBox LoPro Titanium

SKYBOX 16s Limited Edition

ShowCase 15 Quicksilver

ShowCase 20 Quicksilver

SkyBox 16 Carbonite

SkyBox 21 Carbonite

SkyBox NX 16

CBX 16
CBX 18
GrandTour 18

BaseCamp

RoadShower MD (7 gal)
RoadShower SM (4 gal)
RoadShower 4G
RoadShower 7G
SlimShady Awning OG
SlimShady 4.5'
SlimShady 6.5'
SlimShady 8'
MajorShady 270, LH
MajorShady 270, RH

Fish

DoubleHaul
TopWater
ReelDeal

NOTES

id

Note

2

HullRaiser and HighRoller require one set of MightyMount 39H (PN 8003539) to be compatible with Yakima CoreBar, JetStream bars and FX systems.

5

HullyRollers, MultiMount, and Mako Saddles require one set of MightyMount 39H (PN 8003539) per pair to be compatible with Yakima CoreBar, JetStream bars and FX systems.

14

Using Yakima RoundBars with Yakima BaseLine, TimberLine, SkyLine, RidgeLine, or SightLine towers will require the purchase of RoundBar SL Adapter (PN 8003536) sold separately.

69

Visit <https://yakweb-assets.s3.amazonaws.com/HatchClearance.pdf> for rear hatch clearance information regarding cargo boxes.

70

Caution! Proper tower balance and tower placement is critical for this installation. Be sure that racks remain centered on the vehicle throughout installation. Take note, when tensioning the system, be sure to alternate between both sides evenly.

81

All loads extending beyond the length of the roof (except cargo boxes) must be secured to both the front and rear of the vehicle, in addition to the rack.

82

SideWinder (Tandem Bike Mount) is compatible with Yakima RoundBar only.

103

Please check your vehicle's front bar to hatch measurement as well as the ShowBoat 66" instructions, found here <http://assets.yakima.com/Product/instructions/8004068/1>, to ensure compatibility with your target boat weight, roller extension, and vehicle.

104

If crossbar spread is between 24" and 29", length of canoe must be 14 feet or less.

109

Always be sure to tie down your SUP as per instructions. SupPup and SupDawg require using nose tie down strap.

110

If your vehicle is equipped with a sunroof or panoramic glass roof, prior to operation, ensure adequate clearance exists with roof rack and/or accessories installed.

132

Any load/mount extending beyond the rear hatch seam may cause interference.

143

Crossbar spread is fixed.

191

Limited to 2 surf/sail/paddleboards. Boards must be stacked - NEVER carry side-by-side.

604

RoadShower SM and MD can accommodate crossbar spreads of 24" – 50". The distance from the front or rear clamp to the end of the shower must not be greater than 30". Do not mount RoadShower outboard of tower.

611

MajorShady can accommodate crossbar spreads of 26" - 76". The distance from the front or rear clamp to the end of the awning must not be greater than 50". Do not mount greater than 1" outboard of tower.

612

MajorShady is not compatible with Yakima Round Bar or CoreBar.

EXAMPLES